


Meyn screw chiller

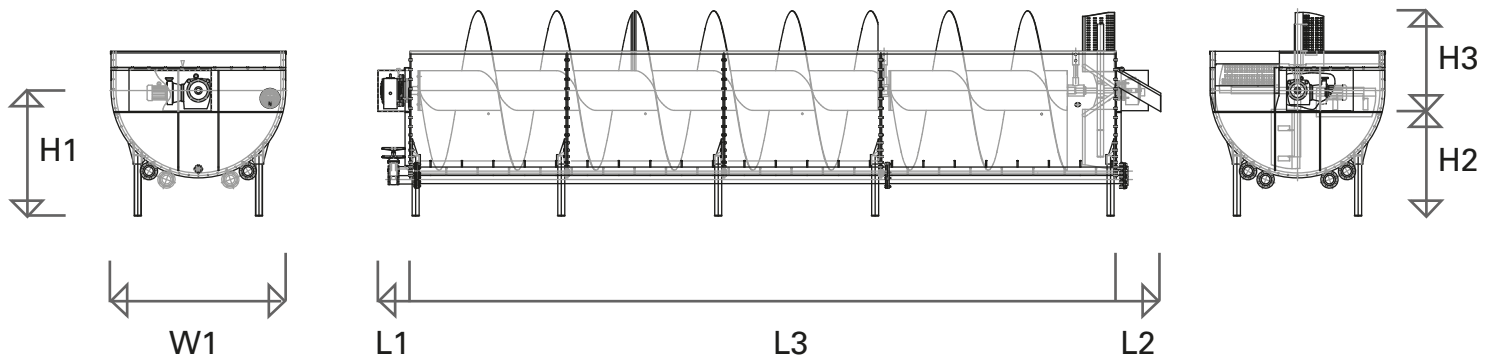

| | | Width 1,600 | Width 2,100 |
|------------------------------|------|-------------------------------------|--------------------------------|
| Length (L1) | mm | 450 | 450 |
| Length (L2) | mm | 500 | 500 |
| Length (L3) | mtr | 3, 5, 6, 9, 12, 15 | 3, 5, 6, 9, 12, 15, 18, 21, 24 |
| Height (H1) minimum | mm | 1,025 | 1,180 |
| Height (H2) rumbler | mm | 1,750 | 1,800 |
| Height (H3) minimum | mm | 790 | 1,025 |
| Electric power installed | kW | Drive motor: 0.12, 0.25, or 0.55 | |
| | kW | Windmill motor (option): 1.1 | |
| | | Speed control: Frequency controller | |
| | kW | Blower (1 per 6 mtr chiller) | |
| Water consumption (standard) | l/kg | 2.5 | 2.5 |
| Water connection | BSP | 2" external | 2" external |
| Drain connection | BSP | 4" internal | 4" internal |
| Overflow connection | DN | 200 | 200 |
| Agitation connection | DN | 100 | 100 |
| Temperature gauge socket | BSP | 1/2" | 1/2" |
| Separate unloader | | yes | yes |
| Options: Double agitation | | yes | yes |

Technical Data Sheet

Head office:

Meyn Food Processing Technology B.V.
 Westeinde 6, 1511 MA Oostzaan (Amsterdam)
 P.O. Box 16, 1510 AA Oostzaan
 The Netherlands

T: +31 (0)20 2045 000
F: +31 (0)20 2045 001
I: www.meyn.com

MEYN

Poultry Processing Solutions

Meyn screw chiller

- Flexible and modular design.
- Sturdy construction.
- Frequency controlled motorreductor.

